

# MR-16

## Features:



LED equivalent replacement for halogen bulbs. Used for all retail, commercial, and industrial applications.

UL Listed

Dimmable and Non-Dimmable



24/7 Commercial Use

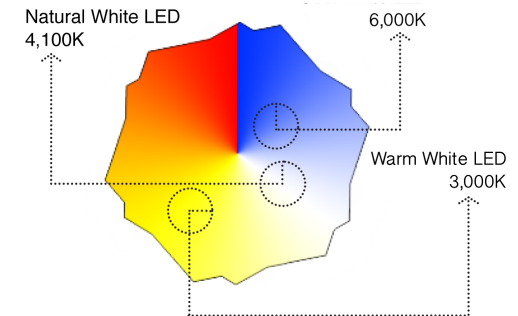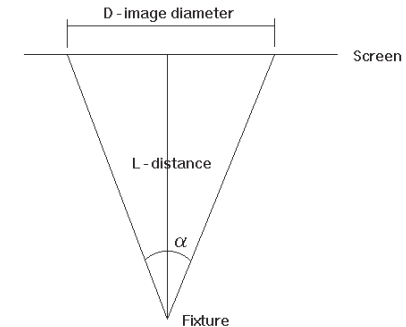

## Electrical Optical Characteristics

| Model           | Beam Angles  | Lumens | Watts | Volts     | Chip      | Lumens/Color                 |
|-----------------|--------------|--------|-------|-----------|-----------|------------------------------|
| EFL-MR16-ED-3X1 | 15/30/45/60° | 180lm  | 4w    | AC/DC 12V | Edison    | CW 6000K , NW 4100K, WW 3000 |
| EFL-MR16-ED-3X2 | 15/30/45/60° | 180lm  | 4w    | AC/DC 12V | Edison    | CW 6000K , NW 4100K, WW 3000 |
| EFL-MR16-ED-3X3 | 15/30/45/60° | 180lm  | 4w    | AC/DC 12V | Edison    | CW 6000K , NW 4100K, WW 3000 |
| EFL-MR16-CR-3X3 | 15/30/45/60° | 295lm  | 4w    | AC/DC 12V | CREE XP-E | CW 6000K , NW 4100K, WW 3000 |